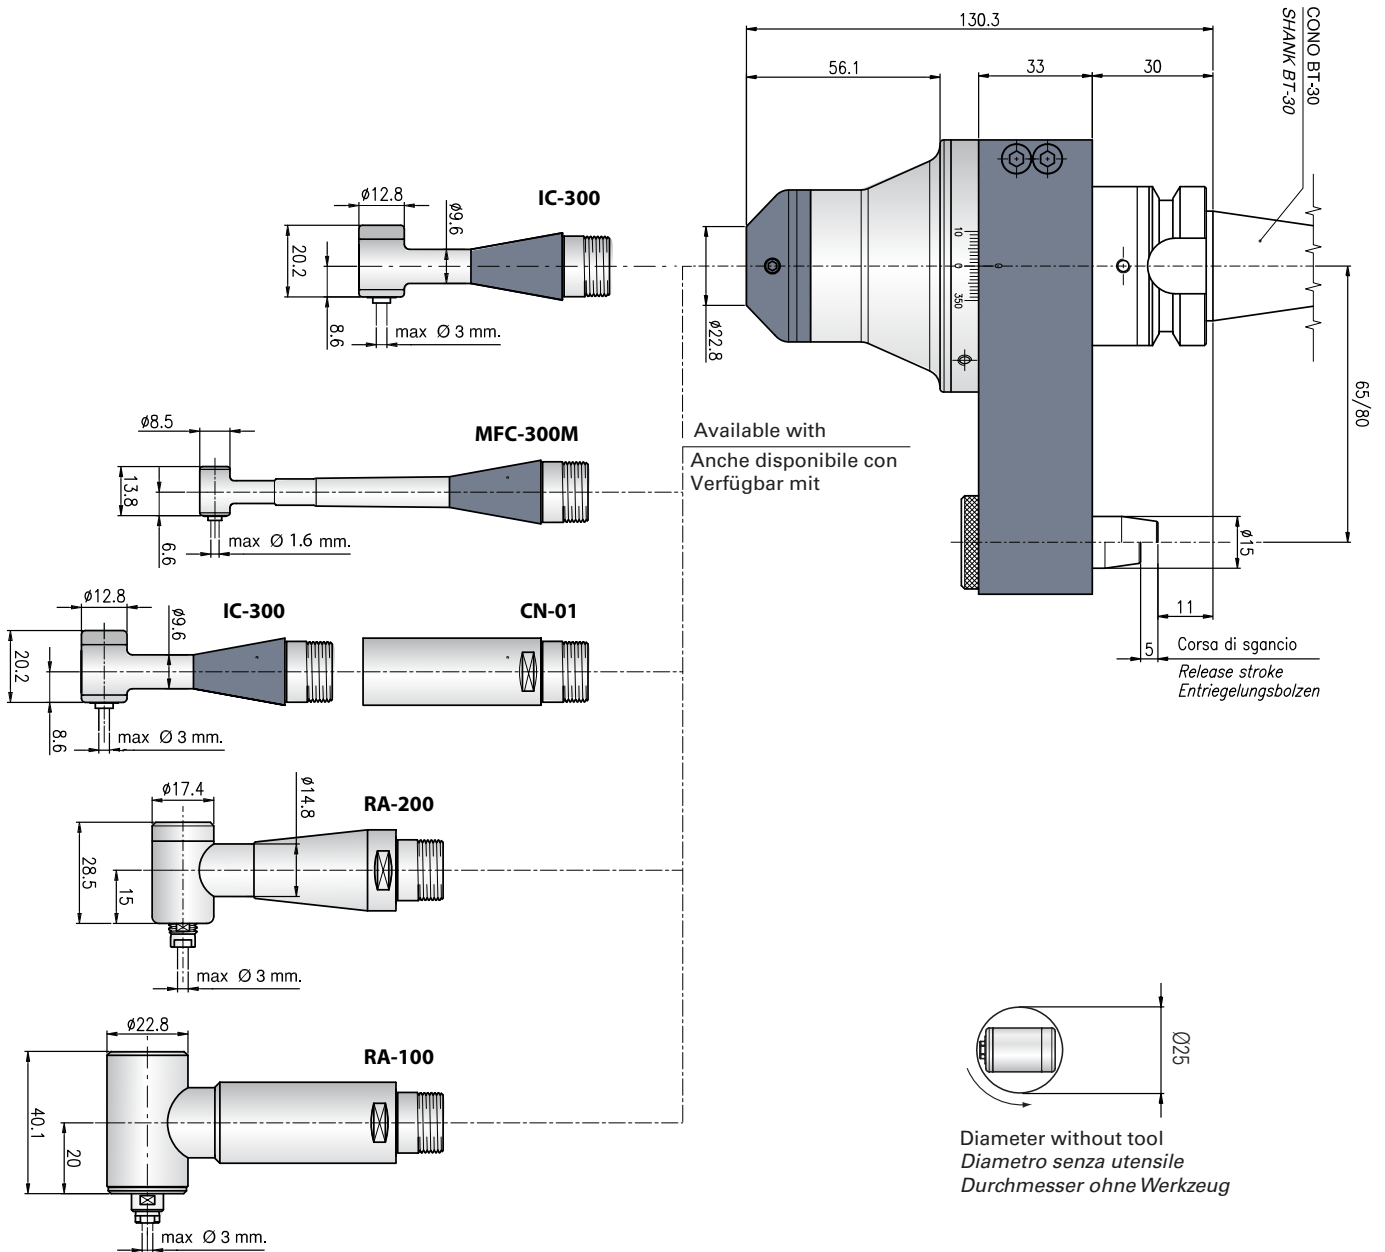


Spindle driven heads up to 20.000 min⁻¹

MINILINE

Driven through machine motor / azionamento tramite mandrino macchina / durch die Spindel angetrieben

**Technical Data / Dati Tecnici / Technische Daten**

		IC-300*
RPM max. / Max. Velocità / Drehzahl max.	min ⁻¹	20.000
Rt. reduction / Rt. in riduzione / Rt. Reduktion		3/4
Collet / Pinze / Spannzange	mm	CHM Ø3
Type Spindle / Tipo di manipolo / Spindeltyp	W	IC-300
Rotation / Rotazione / Rotation		right/destra/recht, left/sinistra/links
Weight / Peso / Gewicht	Kg	3

STANDARD EQUIPMENT INCLUDES: NAKANISHI Kit / Angle head / Collet / Wrenches / Instruction book

* For special applications only / solo per applicazioni speciali / nur für Sonderanwendungen