

T90cn-5L



Ratio
Rapporto / Verhältnis
1:1



RPM
Velocità / Drehzahl max.
3.000 min⁻¹



Max. axial load
Max. carico assiale / Max. Axialbelastung
1.800 N



Torque
Momento torcente / Drehmoment
100 Nm



Weight
Peso / Gewicht
26,2 kg





Collet
Pinza / Spannzange
ISO 40

*** STANDARD EQUIPMENT INCLUDES:**




- Wooden case - wrenches - Grease tube - Instruction book
- Cassa legno - Ghiera ER chiavi di servizio - Tubetto di grasso - Libro istruzioni
- Holzkiste - Schraubenschlüssel - Tube mit Fett - Bedienungsanleitung

Minimum diameter without tool
Diametro minimo senza utensile
Durchmesser min. ohne Werkzeug

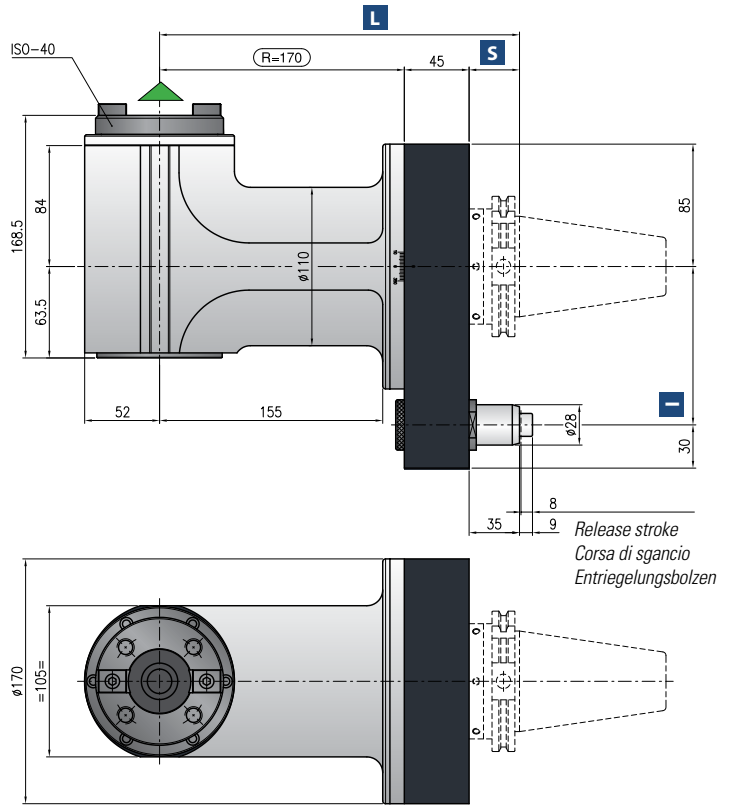

Possibilità refrigerante / Internal coolant / Innere Kühlmittelzufuhr - Max. 12 bar

▲ Direction of rotation same as machine spindle / senso di rotazione uguale al mandrino / Drehrichtung gleich wie Antriebsspindel



Shank/Cono/Aufnahme	DIN-69871	CAT	MAS-BT	HSK	CAPTO
Size/Grandezza/Größe	50		50	80	100
I	110		110	110	110
S	35		41	42	45
L	250		256	257	260

*optional

Non interchangeable input drive shank/ Coni di attacco non intercambiabili/ Nicht wechselbare Aufnahme

Option / Opzione / Option



bar max
12

Coolant through pin
Refrigerante attraverso il perno
Kühlmittelzufuhr durch Bolzen



bar max
12

Coolant through pin and spindle
Refrigerante interno attraverso utensile
Kühlmittelzufuhr durch Bolzen und Spindel



min⁻¹
6.000

High speed optional RPM max.
Opzione alta velocità RPM max
Drehzahl max.



HSK-63

Quick Change
Attacco rapido
Schnellwechsellafnahme